

### COMFORT HEIGHT® TOILET K-3950

ADA

CSA B651

OBC




#### Features

- Vitreous china
- Elongated bowl
- Comfort Height®
- AquaPiston® flushing system
- Less seat and supply
- 12" (305 mm) rough-in
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) glazed trapway
- Includes left-hand polished chrome trip lever
- 11-1/2" (292 mm) x 9" (229 mm) water area
- 30-1/4" (768 mm) x 16-5/8" (422 mm) x 31-1/4" (794 mm)

#### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.19.2/CSA B45.1
- EPA WaterSense®

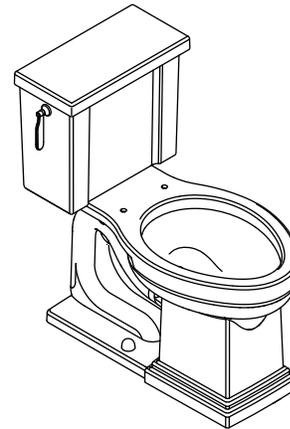

#### Colors/Finishes

- 0: White
- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

#### Specified Model

Model	Description	Trip Lever	Colors/Finishes	
K-3950	Comfort Height toilet	left-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
<b>Recommended Accessories</b>				
K-7637	Angle supply with stop – 3/8" NPT		<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-4650	Lustra™ elongated open-front toilet seat - for Accessibility compliance	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
K-4774	Brevia™ elongated toilet seat	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____

#### Product Specification

The elongated bowl toilet shall be made of vitreous china. Toilet shall be 30-1/4" (768 mm) in length, 16-5/8" (422 mm) in width, and 31-1/4" (794 mm) in height with an 11-1/2" (292 mm) by 9" (229 mm) water area. Toilet shall be Comfort Height. Toilet shall have a 12" (305 mm) rough-in, and 2-1/8" (54 mm) glazed trapway. Toilet shall be 1.28 gpf (4.8 lpf) with AquaPiston flushing system. Toilet shall include left-hand polished chrome trip lever. Toilet shall be less seat and supply. Toilet shall be Kohler Model K-3950-\_\_\_\_\_.

# TRESHAM™

## Optional Accessories

K-9375 Left-hand trip lever (non-CP finish)

Other \_\_\_\_\_

## Technical Information

Fixture:	
Configuration	two-piece, elongated
Water per flush	1.28 gpf (4.8 lpf)
Passageway	2-1/8" (54 mm)
Water area	11-1/2" (292 mm) x 9" (229 mm)
Water depth from rim	5-3/8" (137 mm)
Seat post hole centers	5-1/2" (140 mm)

Included components:	
Bowl	K-4799
Tank	K-4899
Tank cover	1146775
Trip lever, left-hand	1161319
Bolt cap accessory pack	1013092

## Installation Notes

Install this product according to the installation guide.


**For back-to-back toilet installations:** Use only a 45° double wye fitting.

Will comply with the Americans with Disabilities Act (**ADA**) when installed per the requirements of the 2010 ADA Standards of Accessible Design, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.

The model is acceptable for left-hand Accessible compartment installations only.

Will comply with **CSA B651** when installed per Clause 4.3.6 of the standard.

Will comply with **OBC** Barrier Free requirements when installed per Clause 3.8.3.8 and 3.8.3.9.

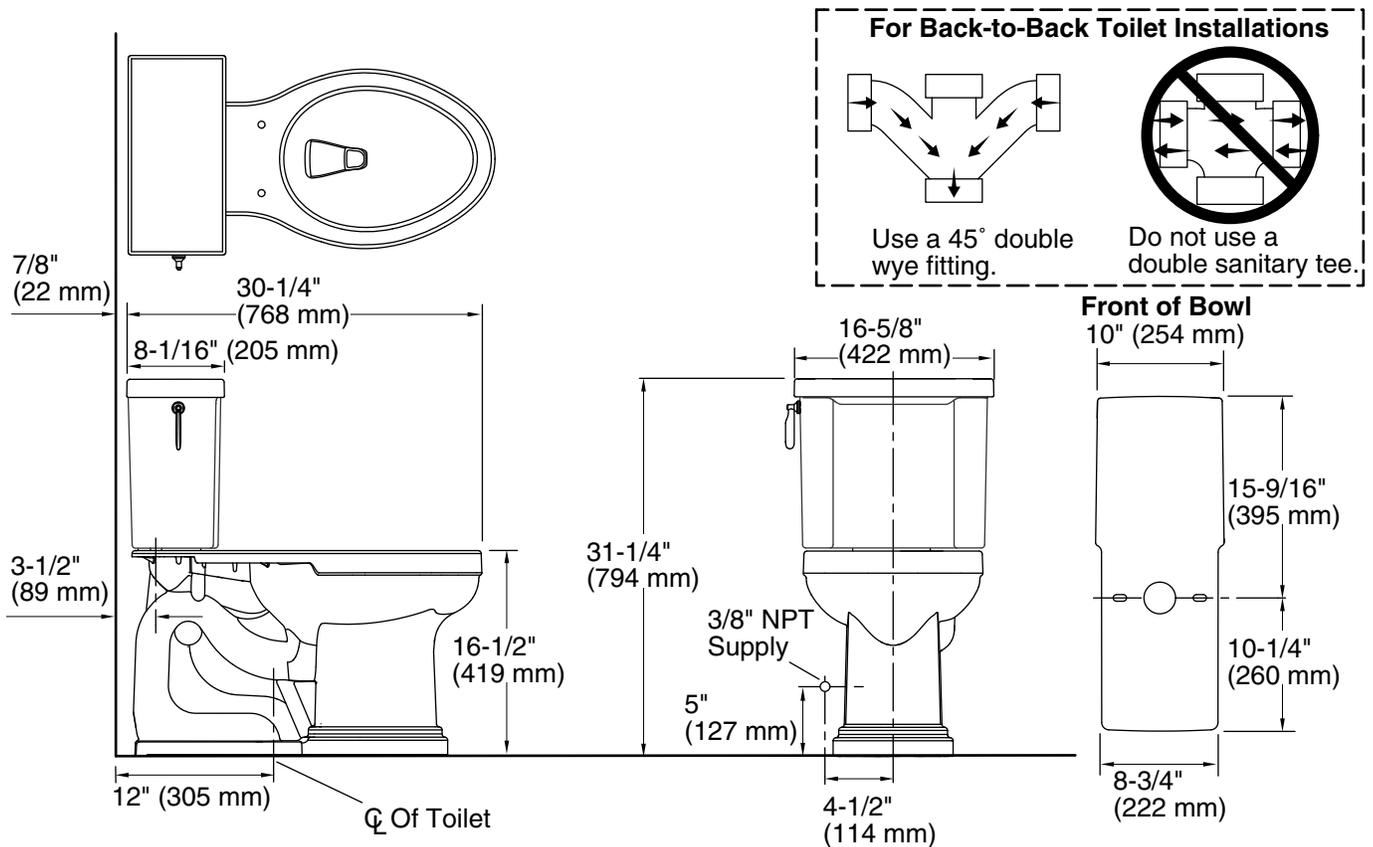

## Product Diagram